

Dane aktualne na dzień: 15-05-2024 16:11

Link do produktu: <https://www.telewizja-przemyslowa.pl/kamera-bcs-p-dip52vsr4-ai1-g-p-11801.html>



Kamera BCS-P-DIP52VSR4-Ai1-G

Cena brutto	990,00 zł
Cena netto	804,88 zł
Dostępność	Dostępny
Kod producenta	BCS-P-DIP52VSR4-Ai1-G
Producent	BCS

Opis produktu


Kamera BCS-P-DIP52VSR4-Ai1-G



Charakterystyka:

- Sensor 1/2.8" 2Mpx PS CMOS
- Starlight technology
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- IR cut filter with auto-switch
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(android, iOS), P2P, Onvif
- Functions AWB, AGC, AES, BLC, HLC, ROI, Defog, WDR(120dB), 2D/3D DNR
- Motion detect, privacy masking
- Intelligent function: perimeter protection, crossline, intrusion
- IR range up to 40m
- Motozoom lens 2.7-13.5mm F1.2
- Built-in microphone
- 1 audio in / 1 audio out
- 1 alarm in / 1 alarm out
- Outside metal casing IP67, IK10

- Working environment -30°C ~ +60°C
- Edge storage microSD to 256GB
- Power supply DC 12V / PoE(802.3af)

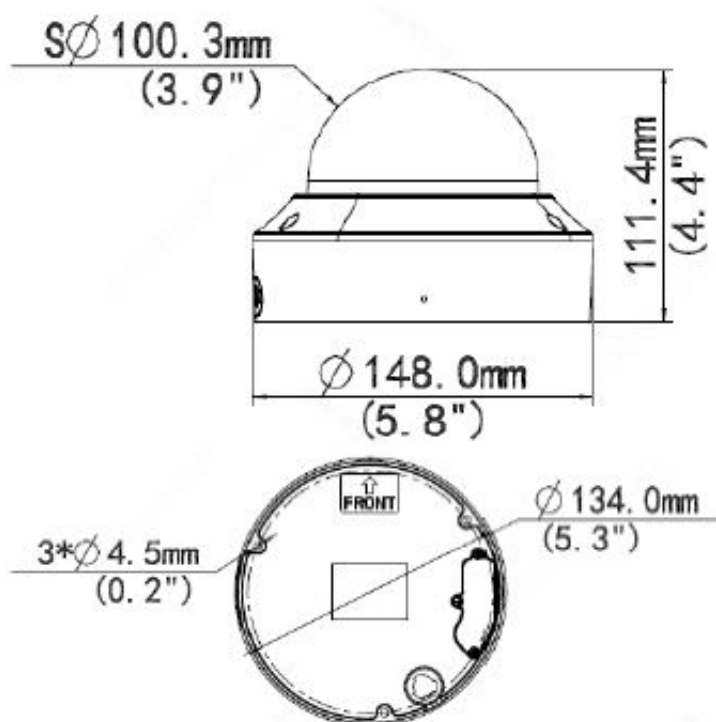

Specyfikacja:

Video system	IP
Scanning system	Progressive Scan
Sensor	1/2.7" 2Mpx CMOS
Pixels	1920(H) × 1080(V)
Min. illumination	0.0005Lux/F1.2 (Color, AGC On); 0Lux(B/W, IR On)
S/N ratio	> 52dB
Lens	Motozoom 2.7-13.5mm F1.2
Angle of view	H: 107.4°~ 29.2°, V: 54.2°~ 16.3°
DORI	Detect 42-210m /Observe 17-84m /Recognize 8-42m / Identify 4-21m
White balance	(AWB) Auto/manual
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D DNR
Motion detect	4 areas
Privacy masking	4 areas
Image rotate	Mirror, flip
Day/night	IR cut filter witch auto-switch ICR
IR range	40m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	1080P/720P@30fps
Second stream	720P/D1/(640×360)/2CIF/CIF@30fps
Third stream	D1/(640×360)/2CIF/CIF@30fps
Network	RJ-45 (10/100Mbps)
Audio	1 audio in / 1 audio out / built-in microphone
Audio compression	G.711
Alarm	1 alarm in / 1 alarm out
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, P2P
Compatibility	ONVIF(S/G/T)
Users	Max 10 logged in
Mobile	iOS, android
Edge storage	microSD 256GB
Power supply	DC 12V (±25%) / PoE(IEEE802.3af)
Power consumption	7W
Working environment	-30°C ~ +60°C, 10%~95% RH
Casing	IP67, IK10
Weight	0.97kg
Dimensions	Φ148 × 111mm

Akcesoria uzupełniające

Adapter
BCS-P-A171(-G)



Uchwyt ścienny
BCS-P-U111(-G)



Uchwyt sufitowy wpuszczany
BCS-P-A151



Uchwyt sufitowy
BCS-P-U54 + BCS-P-P141

